


NIGHTJAR


REMOTE CONTROL LAMP

LUMIÈRE DE CONTRÔLE À DISTANCE | LUZ DE CONTROL REMOTO
SPIA DEL TELECOMANDO | FERNBEDIENUNG LICHT | AFSTANDBEDIENING LICHT

User Guide

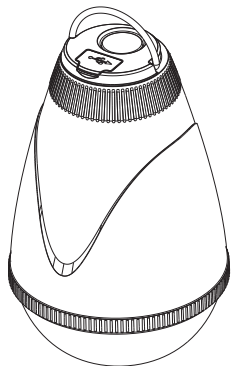

PRODUCT DETAILS

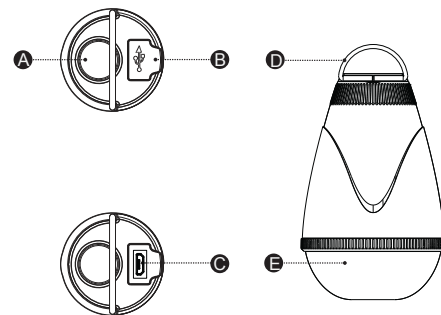

- A Rain-resistant on/off button
- B Rain-resistant port cover
- C Charging port (Micro USB)
- D Hanging Hook
- E Light

— 01

REMOTE CONTROL INSTRUCTIONS

1. The remote control works from distance of 7 meters, the remote control needs to point in the direction of the Nightjar.
2. Before shipping, there is a insulating tip on the battery in order to protect battery. Please remove it before using.

CHARGING INDICATION

1. Red light will flash when charging, and will be solid when full charged.
2. When capacity of battery is less than 5%, red light will flash every few seconds.

If Nightjar is off, it will need to be turned on via the light on the product rather than the remote.


USAGE TIME

Different power grades has different life using time.

Grade	Brightness	Battery life
Low	~2%	~150h
Medium	~30%	~14h
High	~100%	~4h

— 04

REMOTE

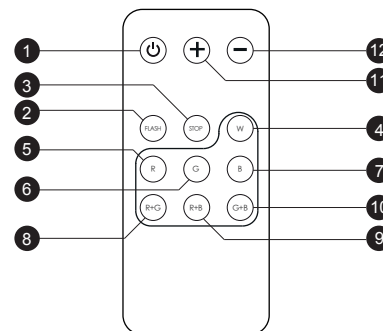

1. ON/OFF, Press this button to turn on or turn off the lights.(Light color was memorized before closing)
2. Multi-color flashing mode
3. Stop flashing mode
4. White
5. Red
6. Green
7. Blue
8. R+G (Yellow)
9. R+B (Purple)
10. G+B (Light Blue)
11. +: Increasing the rate when in flashing mode; High brightness when in normal mode.
12. -: Decreasing the rate when in flashing mode; Low brightness when in normal mode.

— 02

PRODUCT FEATURES

1. IP Rating: IP65 Waterproof for rain
2. Product with RGBW lights, and other 3 mixed colors with R+G (Yellow), R+B (Purple) and G+B (Light Blue)
3. With infrared remote control, workable distance is 7 meters.
4. Built-in rechargeable lithium battery.

PACKING LISTS

1. Nightjar
2. Remote control
3. 1x Micro USB to USB cable
4. 1x Carabiner

PRODUCT SWITCH GUIDES


- 1 Press - Medium White Light
- 2 to 5 Presses will change the colour
- Long Press to turn the Nightjar off

— 03

PRODUCT DESCRIPTIONS

Name	Nightjar	Remote	IR remote control
Input	DC 5V 700mA	Brightness	150lm(MAX)
Wattage	1.5W(MAX)	Weight	147g
Size	~Φ70×H110.5mm		
Battery	3.7V 2000mAh		
Color temperature	5500K		
Charging time	~4 hours		
Applications	Indoor/Outdoor		
Working temperature	0~40℃		
Storage environment	-10~50℃		

Executive Standard: GB 7000.204-2008 / GB7000.1-2007



- Any liquid, including rain or water, spills into the product that will damage electronic components.
- Products gives off gas or has an unusual flickering.
- The cable is damaged and the bare wire is visible
- The case is broken.



— 05



PLEASE NOTE

1. Neither put or use the Nightjar in high temperature or extreme environments nor exploded under strong sunlight.
2. Do not throw the Nightjar into fire.
3. Please keep the Nightjar out of reach of children.
4. Please do not disassemble the Nightjar.
5. Please do not shake, beat or strike the Nightjar.
6. Please do not to use the Nightjar if you notice cracks or swelling.
7. If Nightjar is leaking and liquid gets in eyes, wash eyes thoroughly, seek medical attention if required.
8. It is normal that the temperature of the Nightjar surface increases during use. Let it cool before storing it.
9. Children shouldn't use the Nightjar unsupervised.
10. Please charge the Nightjar at least once every three months.
11. Please unplug the Nightjar from power supply when fully charged.
12. Please do not place the Nightjar in a wet environment or water when charging.

— 06



PART CODE: PTL-NJL008
EAN CODE: 5060176980105
UPC: 812097030088