



## Hi-Lux Optics Phenom 5-30X56 FFP



### MAIN FEATURES

#### Incredible Light Gathering Ability

- The 56mm objective lens and 34mm tube enables the PM530X56 to gather more light.
- Allows for better sight picture resolution and clarity when shooting at dawn or dusk




#### Quick Locking Turrets

- The Phenom 5-30X56 FFP scope's tool-less locking turrets prevent accidental windage or elevation adjustment.
- There are 12 Mils of Adjustment per turn for elevation. 1 full turn on windage allows the operator to move the point of impact 6 Mils Right or Left.



FFP Mil Grid Reticle

- The CW-3 Mil Grid reticle bolsters first shot placement and enables quick follow-up shots.
- The horizontal axis and Christmas tree indicate 0.2 Mil subtensions. The vertical axis indicates 0.5 Mil Subtensions.
- Main Picture : CW-3 Center View with Subtensions

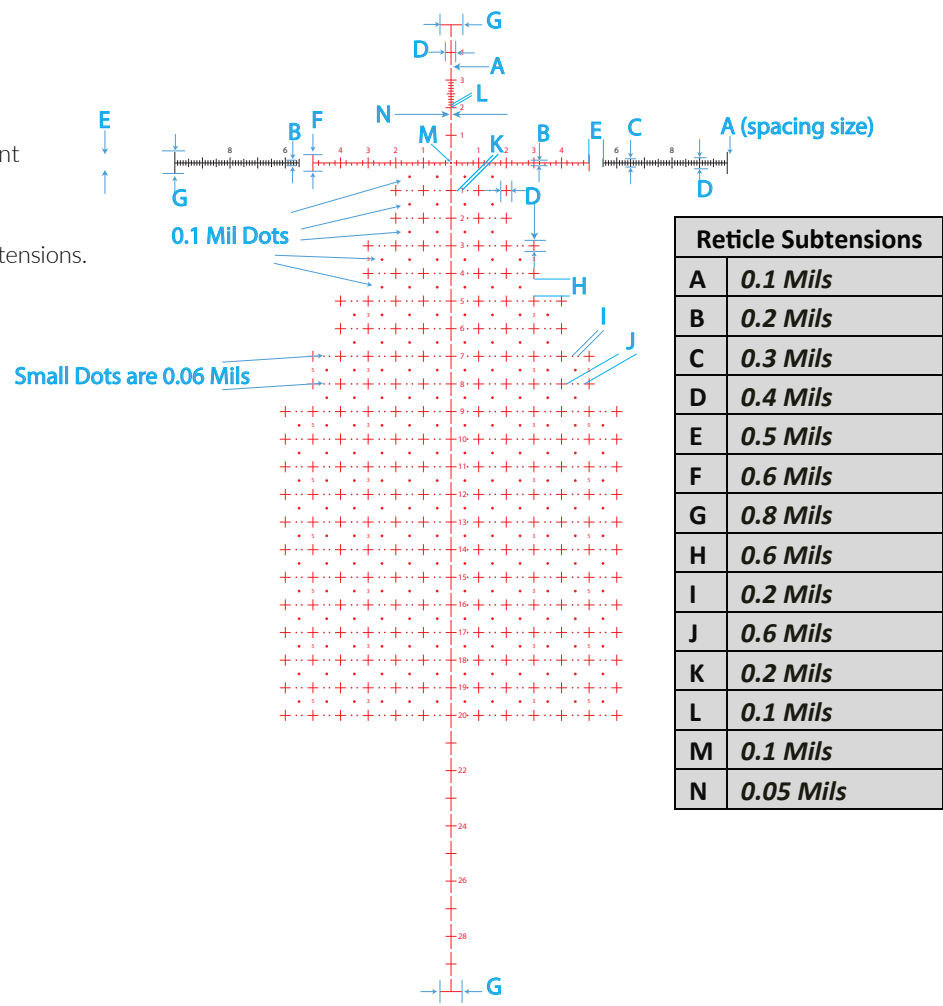

Scope Features

 <p>HD Low Dispersion glass improves color fidelity in low light</p>	 <p><b>FFP Reticle</b> The first focal plane reticle is accurate at every magnification setting.</p>	 <p><b>Waterproof</b> Rubber O-ring seals prevent moisture, dust, and debris from penetrating the scope.</p>	 <p><b>Fully Multi-Coated Lenses</b> All exterior air-glass lenses are treated with DiamondTuff14 to ensure optimal light transmission.</p>
 <p><b>PermaCoat</b> Soft-luster blue black finish coat prevents accidental scuffs and scratches.</p>	 <p><b>ShockProof</b> Shockproof construction withstands rifle recoil.</p>	 <p><b>Nitrogen Purged</b> All scopes are nitrogen purged to ensure fogproof performance throughout a wide range of temperatures.</p>	 <p><b>DiamondTuff Guarantee</b> Lifetime warranty against material and manufacturing defects.</p>

Technical Specs:

Model	Power	Obj. (mm)	F.O.V.@ 100 Yds (Feet)	Eye Relief (Inch)	Length (Inch)	Weight (O.Z.)	Exit Pupil Range In Variable (mm)	Tube Diameter (mm)
PM530X56	5X - 30X	56	25' - 4'	3.75"	14.6	36	10mm - 1.66mm	34 mm