



INTEGRIX™ 1-8x28 FFP

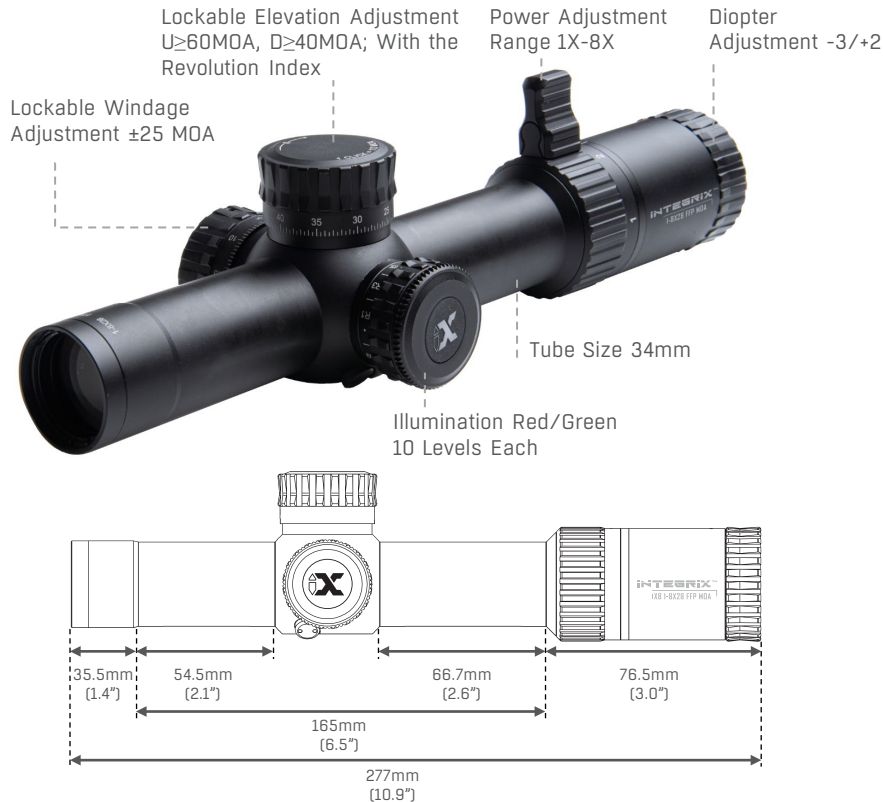

FEATURES

- » Individually Centration Tested German and Japanese Glass, Concentric Tested Post Assembly
- » Multi-Coated Lenses for Glare, Reflection, and Scratch Resistance
- » Low Aberration Optimized Image Quality with Over a 92% Light Transmittance
- » Edge to Edge Sharpness, High Contrast, and High-Resolution Standard
- » Reliable Adverse Temperature and Environmental Performance with -40° to 160° Fahrenheit Operational Range and IPX7 Waterproof Rating
- » Rated, at Minimum, for .338 LAPUA Magnum
- » 12 Hour Automatic Shutoff
- » Intuitive Lockable and Zero Resettable Windage and Elevation Turrets, Serrated and Oversized for Glove Use

PRODUCT

	ITEM#	IX801FA1
	BRAND	INTEGRIX™
	MSRP	Pending
	EAN#	4717385557154

SPECIFICATIONS

Focal Plane	FFP
Reticle	Etched Glass A1 MOA
Illumination	Red & Green, 10 Brightness Settings
Maganification	1X - 8X
Main Tube Diameter	34 mm
Objective Diameter	28 mm
Parallax Setting	Preset @ 100 yds
FOV	22° - 2.8°
FOV @ 100 yds	116.6' - 14.7'
FOV @ 100 m	38.9 m - 4.9 m
Elevation Travel	$U \geq 60\text{MOA}$, $D \geq 40\text{MOA}$; With the revolution index
Windage Travel	± 25
Click Value	1/2 MOA
MOA Per Revolution	50 MOA
Eye Relief	95 mm/3.74"
Exit Pupil	10 mm - 3.5 mm
Diopter	-3D ~ +2D
Length	10.9" / 277 mm
Weight	25.5 oz / 723g
Battery Type	CR2032 3V
Battery Life	Up to 5,000 h

PARTS INCLUDED

Throw Lever	x1	Objective Flip-open Lens Cap	x1
Hex Wrench 2 mm	X1	Ocular Flip-open Lens Cap	x1
Hex Wrench 1.5 mm	x1	CR2032 Battery	x1
Cleaning Cloth	x1	User Manual	x1
Decal Sticker	x1	Warranty Card	x1