


The Nikko Stirling Speed Sight **PRO T5** is designed for fast and accurate target sighting and shooting. The **PRO T5** is supplied with a Weaver / Picatinny claw mount for mounting on any suitable base. Please consult your gunsmith or firearms dealer for advice about the suitability of this sight to your requirements.

## DESCRIPTION

- |                            |  |
|----------------------------|--|
| 1 - Dot Intensity + Button | 5 - Windage Adjustment                 |
| 2 - Dot Intensity - Button | 6 - Elevation Adjustment               |
| 3 - Battery Tray           | 7 - Mount Screws                       |
| 4 - Base Mount Screw       | 8 - Rubber Hood Protection (not shown) |

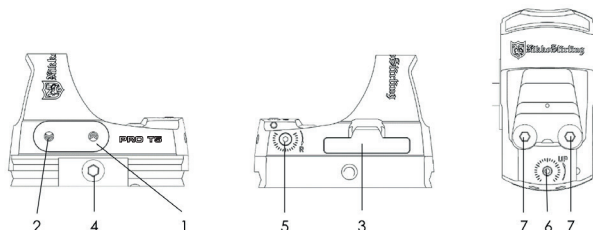


A rubber hood protection for the **PRO T5** is always included.

Depending on country different accessories and dot sizes are delivered. Such as Weaver/Picatinny mount or/and Doctor base adaptor to fit onto doctor mounts.

A wide range of other mounts are available.

## MOUNTING

1. Attach the **PRO T5** to the Weaver base rail and make sure the base sits solid on the base.
2. Check to see that the clamp is fully down and hooked around the outside of the base.
3. Press the **PRO T5** down at your desired position and forward firmly tighten down the clamp screw with the supplied hex wrench.

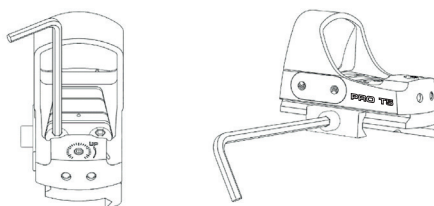


**Note:** Allen Key 2.5 mm and 3.0 mm

## OPERATION

### Battery

To install / replace the battery, gently pull the battery tray out from the sight. Install a new battery with the positive (+) side facing upwards. Push the battery tray back in so it is flush with the body. Battery type: CR2032

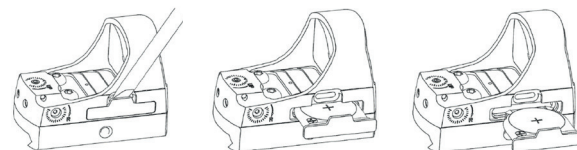

### On / Off

The **PRO T5** uses two pressure buttons that allow to set 10 illumination intensity levels for the Dot brightness.


- For power on/off press either  $\wedge$  or  $\vee$  button for 2 seconds.
- To increase the brightness, press  $\wedge$  button, to fade down it press the  $\vee$  button.
- Automatic shut off after 4 hours inactivity.
- The Sight also features **SmartDot Activation**. Automatic turn off after 3 minutes if in rest position. As soon as the sight senses motion it will automatically power back on the last setting.
- Using push buttons for on/off the red dot turns on at the same level as last setting.

## ADJUSTMENTS

The **PRO T5** sight features adjustable elevation and windage dials with 1 MOA clicks.

**Note:** One click equals 1 MOA  
 $\pm 3\text{cm}@100\text{m}$  ( $\pm 1.5\text{cm}@50\text{m}$ )  $\pm 1\text{inch}@100\text{yds}$  ( $0.5\text{inch}@50\text{yds}$ )

- Elevation adjustment - up/down; on the top of the sight. To adjust the point of impact, insert the provided Allen Key into the hole of the elevation settings marked "UP".
- Windage adjustment - left/right; on the right of the sights. To adjust the point of impact, insert the provided Allen Key into the hole of elevation settings marked "R".
- For further adjusting repeat above steps.

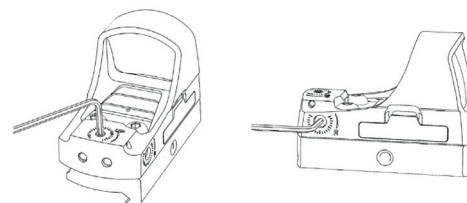


**Note:** Allen Key 1.5 mm

## SPECIFICATIONS

Dimensions (L x W x H) (Sight only)	56.5 x 29 x 32.5 mm
Weight (Incl. Battery)	41.5 g
Window Height	21.5 mm
Window Width	26 mm
Elevation Adjustment Range	100 MOA
Windage Adjustment Range	70MOA
Magnification	1 x
Body Material	Aluminum
Illumination Settings	10 positions
Waterproof	2 m
Battery	CR2032

Dimensions (Sight with Weaver/Picatinny rail mount)

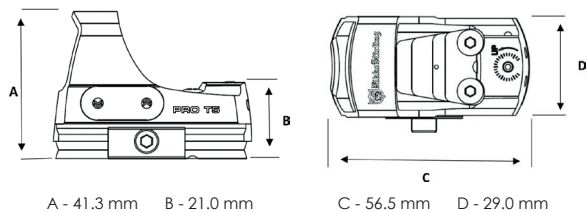

All details are subject to alterations without notice



## Instruction Manual PRO T5



WWW.NIKKOSTIRLING.COM

WWW.NIKKOSTIRLING.COM