



CLX[®] 1-6x24


**ACSS[®] 22LR G2
RETICLE MANUAL**

ACSS® 22LR G2 RETICLE

The ACSS 22LR G2 is an advanced BDC reticle calibrated to match the ballistics of popular .22LR cartridges. Combining a bold crosshair-style design with a center aiming dot, auto-ranging ballistic stadia, and integrated wind holds, the ACSS 22LR G2 is both intuitive yet powerful in the hands of a skilled marksman.


To get the best results, it's important that you familiarize yourself with the various features of your ACSS reticle. This manual provides detailed information on all your reticle's core functions.

NOTE: For Second Focal Plane (SFP) scopes, your auto-ranging and holds are for MAX MAGNIFICATION ONLY.

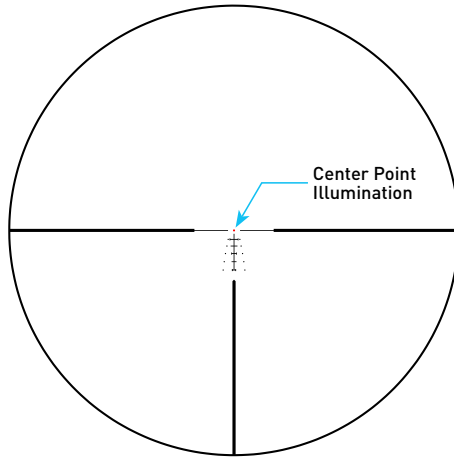

ZEROING & BDC

The ACSS 22LR G2 features a full BDC, allowing for accurate engagements from 50 to 200 yards. This BDC can fit a variety of projectiles and velocities, but its holds are calibrated to best fit 36-40gr projectiles at 1000-1200 FPS.

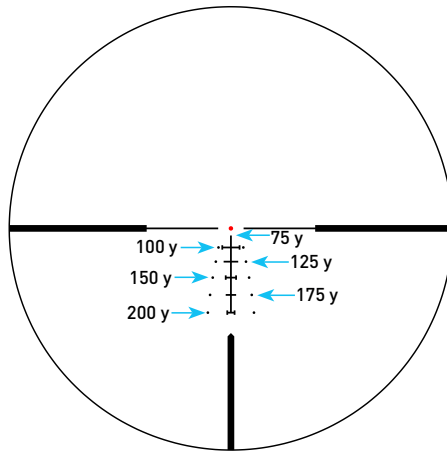


- These BDC stadia are in 25-yard increments, starting at 75 yards at the top of the post.
- Starting at 100 yards, each stadia line is sized to match the diameter of a clay pigeon (~4.3") at its respective distance, allowing for quick ranging with a variety of targets.
- Stadia on 50-yard increments have a distinctive barbell shape (—) for easy reference
- For best performance, start by zeroing your center aiming dot at 50 yards. Then move to 100 yards and adjust until the 100-yard BDC stadia perfectly matches your point of impact.

TARGET RANGING

The ACSS 22LR G2 reticle allows you to range a target using the width of your BDC stadia. Each stadia line is sized to match the diameter of a clay pigeon, or roughly 4.3 inches, at its respective distance. This width can be used to range a wide variety of pests and small game, such as rabbits or gray squirrels.

To range your target, hold your BDC over an appropriate target's cross-section and find the stadia which most closely fits its width. This will give you a quick estimate of the target's distance, allowing you to compensate for drop more effectively.

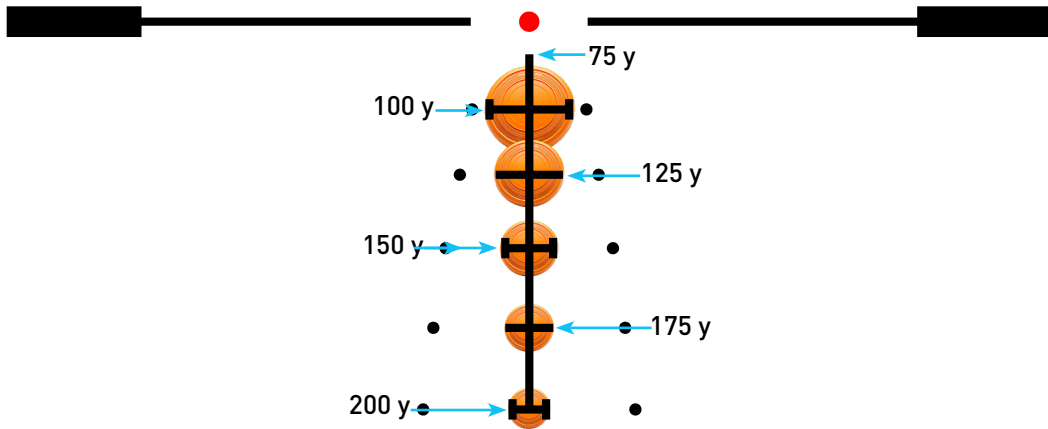

WIND HOLDS


The dots aligned with the BDC stadia serve as 5 mph wind hold references.

For a left-to-right wind, use the wind hold dots on the right side of the reticle.

For a right-to-left wind, use the wind hold dots on the left side.

These references may be used proportionally for different wind speeds. For example, with an approximate 2.5 mph wind, hold halfway to the 5 mph dot. With an approximate 10 mph wind, hold twice the distance indicated by the 5 mph dot.

The wind hold dots are calibrated for use at the scope's maximum magnification setting of 6x.

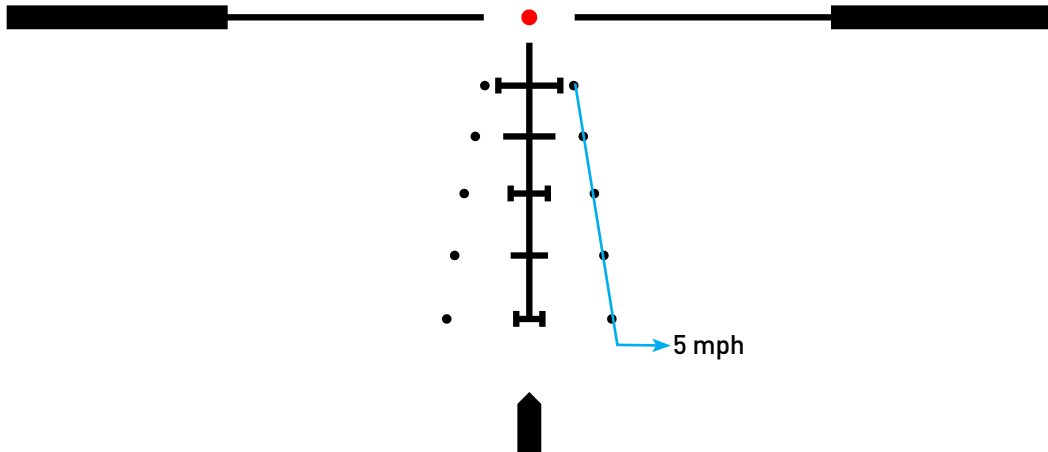

WEAPON				DATE	
SHOT NO.	DIRECTION/DEFLECTION	ELEVATION	RANGE	AMMO	DESCRIPTION

NOTES:

WEAPON				DATE	
SHOT NO.	DIRECTION/DEFLECTION	ELEVATION	RANGE	AMMO	DESCRIPTION

NOTES:



LIFETIME WARRANTY*

Your Primary Arms CLx 1-6x24 Rifle Scope is covered by the Primary Arms Lifetime Warranty. If a defect due to materials or workmanship, or even normal wear and tear has caused your product to malfunction, Primary Arms will either repair or replace your product. You can find more details about our lifetime warranty at www.primaryarmsoptics.com. *See warranty card for details.

*Warranty does not cover loss, theft, deliberate damage, or cosmetic damage.
Visit primaryarmsoptics.com/about-us/warranty-information for details.

Email: info@primaryarmsoptics.com

Toll-free at 855-774-2767

www.primaryarmsoptics.com



SCAN HERE for
more information
on these optics.



©Copyright 2026 PRIMARY ARMS, LLC
is a registered trademark of PRIMARY ARMS, LLC

For Patent Information go to primaryarmsoptics.com/patents