



LEVER ACTION TRIGGER

Thank you for purchasing this Timney Trigger. It has been designed and manufactured to provide you with a lifetime of dependable service. Each trigger is hand tested and calibrated on a rifle action before leaving our factory. Please read these instructions fully before you begin installing the trigger, you will be glad you did.

TOOLS NEEDED



Straight Punch



Slotted Screwdriver

TIMNEY TRIGGER GUARANTEE

Material and workmanship: This Timney trigger has been carefully inspected, tested and adjusted to give a lifetime of dependable service. Every possible care has been exercised in its design and construction. If any defect in workmanship or material should develop under conditions of normal use and service, any necessary repairs, including parts and labor will be made at NO CHARGE to the purchaser providing that our inspection reveals parts were not damaged through accident, alteration, misuse, abuse or other causes beyond our control. We neither assume nor imply any oral or statutory warranties, and we neither assume nor authorize any person to assume for us any obligation or liability in connection with this trigger. Repairs or disassembly of this trigger in any manner without specific authorization, voids the guarantee.



**IF YOU HAVE TROUBLE CHECK OUT TROUBLESHOOTING STEPS ON
WWW.TIMNEYTRIGGERS.COM OR CONTACT US**

Need help with your install? Contact our customer service team via email or phone for assistance.

Phone: 623-223-1111 **Fax:** 623-223-1112 **Support:** technicalsupport@timneyusa.com

INSTALLATION INSTRUCTIONS

- 1** Before beginning work on any firearm, remove the ammunition source and double check to ensure the chamber is empty.
- 2** Remove the screw holding the butt stock and remove the butt stock.
- 3** Ensure the hammer is forward, then remove the spring keeper and the spring.
- 4** Loosen the side screw and bottom screw, then remove the hammer pivot screw. Once the hammer pivot screw is removed, remove the factory hammer assembly.
- 5** Partially pull the lever down then fully unscrew the left side screw and bottom screw. Once unscrewed, remove the lever assembly. **Pro tip from Calvin: these screws look similar, so remember the short screw is for the side. S + S.**
- 6** On the lever assembly, open the lever all the way to remove spring tension then use a punch to push out the trigger pin. Remove the factory trigger.
- 7** Now install the Timney trigger sear assembly and reinsert the trigger pin. Once installed, pull the trigger back and partially close the lever.
- 8** Ensure the locking block is in place, then reinstall the lever assembly. To reinstall the screws, start with the side screw then do the bottom screw. Do not tighten screws down fully until after step 9.
- 9** Fully close the lever then install the Timney hammer assembly. To install the hammer assembly, pull the trigger back and guide the hammer through the receiver.
- 10** Now tighten all the screws down. Start with the hammer screw, then tighten the side screw, and finish with the bottom screw.
- 11** Install the Timney hammer spring and the factory spring keeper.
- 12** Perform a safety and function check.
- 13** Reinstall the buttstock, then perform a final safety and function check.
- 14** You are now ready to enjoy your Timney Trigger!

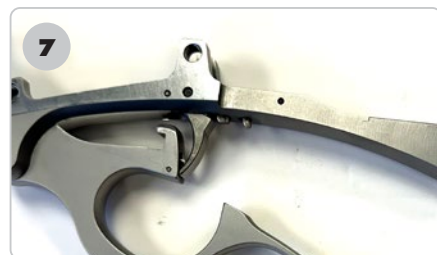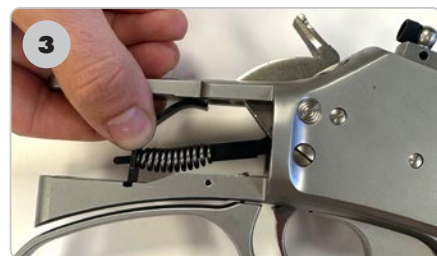

IF YOU HAVE TROUBLE CHECK OUT TROUBLESHOOTING STEPS ON WWW.TIMNEYTRIGGERS.COM OR CONTACT US

Need help with your install? Contact our customer service team via email or phone for assistance.

Phone: 623-223-1111 **Fax:** 623-223-1112 **Support:** technicalsupport@timneyusa.com

