

MARK™ 2.0 FOR OPS-CORE AMP

INSTALLATION INSTRUCTIONS




⚠ WARNING: Over-torquing fasteners can damage your mount and will not be covered by warranty.

Ops-Core ARC™ and Similar

The ARC™ Adapter Plates are designed to work with genuine Ops-Core ARC™ Rail. They are also compatible with similar rails, but may require slight fitting. If the ARC™ Adapter is too tight in a non-Ops-Core rail, carefully remove material with a fine grit sandpaper until optimal fit is achieved.

- 1** Install 2x Nuts into the ARC™ Adapter as shown.
- 2** Slide ARC™ Adapter assembly onto ARC™ rail.
- 3** Using 10-32 x 5/16 Screws (shorter included screws), secure MARK 2.0 assembly to the backer. Lightly snug both screws before applying torque to either. DO NOT EXCEED 10 IN-LBS.

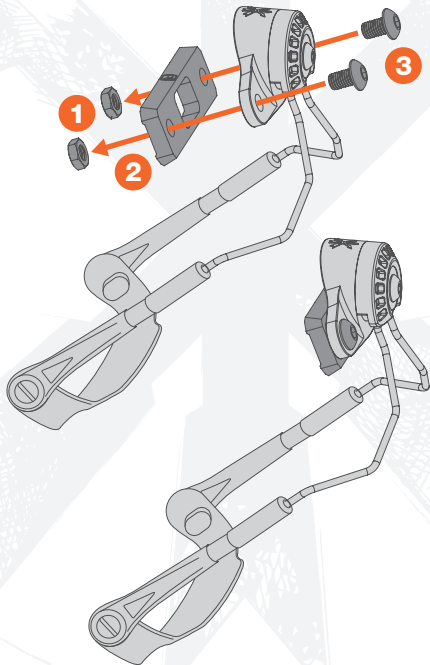

MARKTM 2.0 FOR OPS-CORE AMP

INSTALLATION INSTRUCTIONS




⚠ WARNING: Over-torquing fasteners can damage your mount and will not be covered by warranty.

Team Wendy EXFIL[®] Rails

Remove the two screws holding the EXFIL Accessory Cover Plate in place. Put them in a safe location in case they are re-installed at a later time. Leave the Accessory Cover Plate in place.

- 1** Using 10-32 x 7/16 Screws (Longer included screws), secure MARK 2.0 assembly to the rail. Lightly snug both screws before applying torque to either. DO NOT EXCEED 10 IN-LBS.

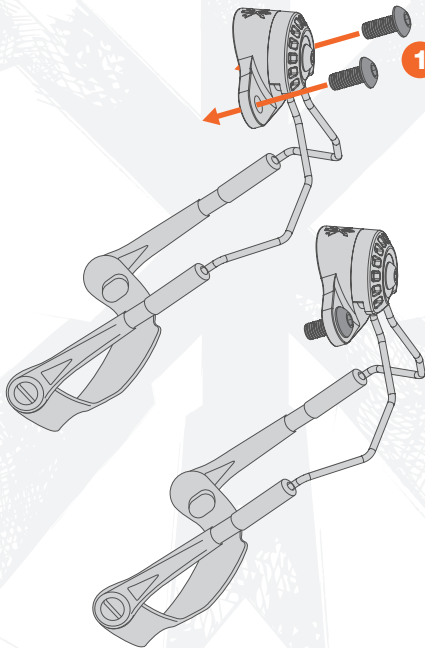

MARK™ 2.0 FOR OPS-CORE AMP

INSTALLATION INSTRUCTIONS



⚠ WARNING: Over-torquing fasteners can damage your mount and will not be covered by warranty.

M-LOK™ Rails

The M-LOK™ MARK 2.0 Accessory Kit is sold separately.

- 1** Install the M-LOK™ Nuts and 10-24 x 3/8 screws included in the MARK 2.0 M-LOK™ Accessory Kit through the MARK 2.0 body.

- 2** Secure MARK 2.0 assembly to M-LOK™ helmet rail using normal M-LOK™ mounting procedures. Lightly snug both screws before applying torque to either. DO NOT EXCEED 10 IN-LBS.

